

# XF Series

## Solid Door Reach-In Freezers

MODEL #XF-2-HC

### CABINET CONSTRUCTION

Heavy duty all-stainless steel construction includes corrosion-resistant 304 stainless steel interior and durable 430 stainless steel exterior.

Foamed-in-place CFC- and HCFC-free polyurethane insulation enhances the structural integrity of the cabinet and helps increase

Removable one-piece grill simplifies cleaning and servicing.

Stainless steel solid door has stay-open feature beyond 90° for easy loading, but will self-close under 90° to save energy. Each door is outfitted with an easy-to-grasp full length handle

### REFRIGERATION SYSTEM

Environmentally-safe R290 refrigerant. Bottom-mounted condensing unit positioned for easy maintenance.

“No stoop” lower shelf raises product to a higher level for easy access.

### SHELVING

3 gray epoxy-coated steel shelves included.

Each accommodates up to 120 lb.

### MODEL FEATURES

Preprogrammed digital controls feature auto-defrost function.

Shelf rails accommodate full size food pans for storage flexibility. Optional bun pan rails accommodate full size bun pans.

Interior back panel separates shelf and back wall to promote proper airflow.

# Xiltek

### XF Series REACH-IN FREEZER

Keep ingredients within a safe temperature range in a sleek, durable, and easy-to-clean environment

### SPECIAL FEATURES

- Self-closing doors with convenient stay-open feature
- Easy-to-clean 430 series stainless steel exterior
- Corrosion-resistant 304 series stainless steel interior
- Temperature range of (-8)°F - (-1)°F
- 6 shelves included; versatile shelf slide design also accepts full size food pans
- Environmentally-safe R290 refrigerant
- Digital temperature controller with automatic defrost function
- 115V; 1 HP
- ETL Safety & Sanitation Listed



★ Conforms to UL & NSF-7 Standards

| Model   | Doors | Shelves | Cabinet Dimensions<br>(inches)<br>(mm) |               |                | CAP.<br>CU.FT.<br>LITER | HP | Voltage  | Amps | NEMA Config.                                                                                |
|---------|-------|---------|----------------------------------------|---------------|----------------|-------------------------|----|----------|------|---------------------------------------------------------------------------------------------|
|         |       |         | L                                      | D             | H              |                         |    |          |      |                                                                                             |
| XF-2-HC | 2     | 6       | 54<br>1371                             | 32 1/4<br>818 | 82 1/4<br>2095 | 47<br>1321              | 1  | 115/60/1 | 10.7 | 5-15P  |

# XF Series

## Solid Door Reach-In Freezers

MODEL #XF-2-HC

### TECHNICAL DATA



#### Dimensions

|                      |                       |
|----------------------|-----------------------|
| Exterior Dimensions  | 54"W x 32¼"D x 82½"H  |
| Interior Dimensions  | 49⅜"W x 27⅞"D x 60¼"H |
| Net Volume           | 47 cu. ft.            |
| Net Weight           | 448 lb.               |
| Gross Weight         | 530 lb.               |
| Packaging Dimensions | 56¼"W x 34¾"D x 85½"H |

#### Construction

|                     |                              |
|---------------------|------------------------------|
| Exterior Material   | 430 Stainless Steel          |
| Interior Material   | 304 Stainless Steel          |
| Insulation Material | Foamed-In-Place Polyurethane |
| Shelf Size          | (6) 20⅞"W x 25⅜"D            |
| Shelf Material      | Epoxy-Coated Steel           |
| Shelf Load Capacity | 120 lb.                      |



#### Cooling

|                          |                 |
|--------------------------|-----------------|
| Temperature Range        | (-8)°F - (-1)°F |
| Refrigerant              | R290            |
| Max. Ambient Temperature | 100°F           |
| Defrosting               | Automatic       |
| Temperature Controller   | Digital         |
| Horsepower               | 1               |

#### Electrical

|                        |            |
|------------------------|------------|
| Voltage                | 115        |
| Amps                   | 10.7       |
| Hz                     | 60         |
| Phase                  | 1          |
| Plug Type              | NEMA 5-15P |
| Electrical Cord Length | 96"        |

### PLAN VIEW

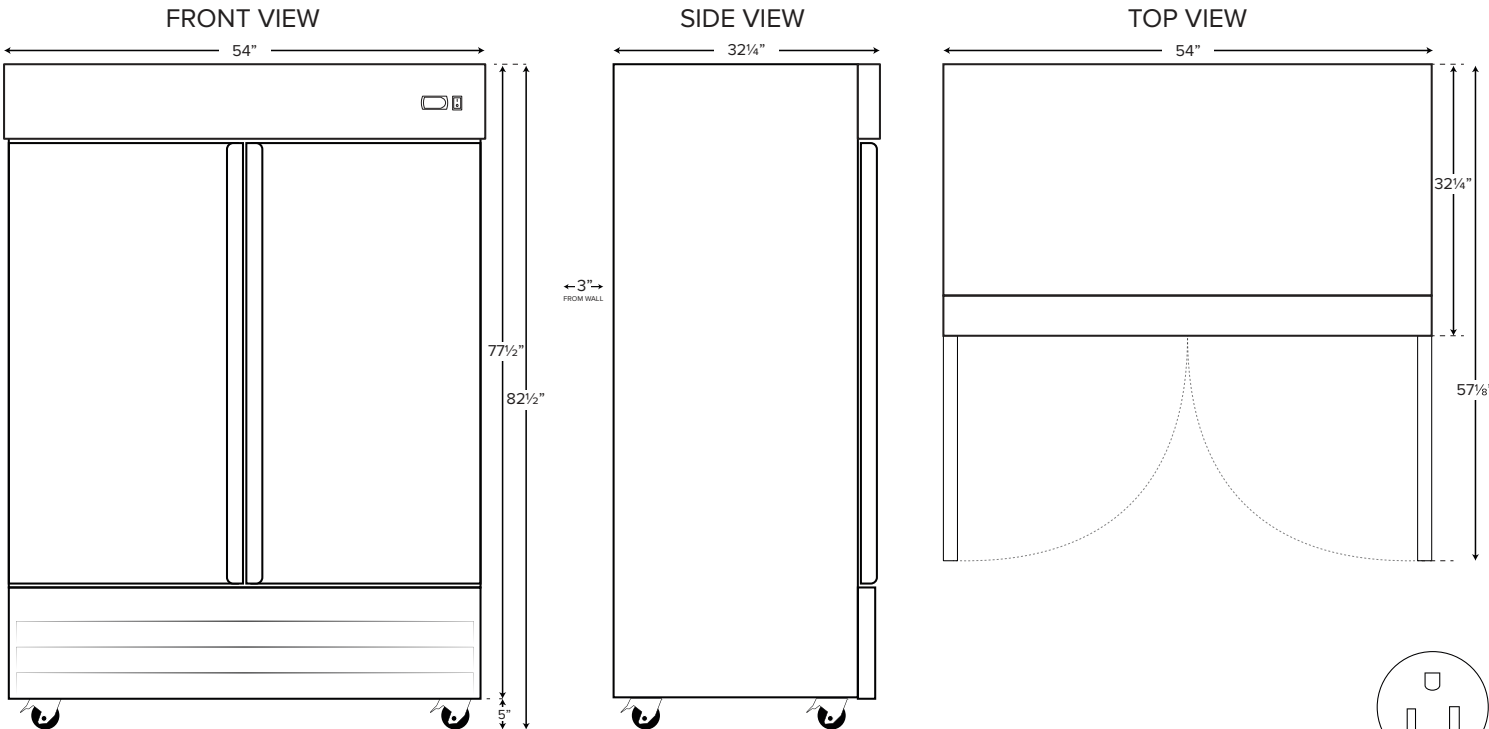

NEMA 5-15P