

XGF Series

Glass Froster

Xiltek

MODEL #XGF-50-HC

GF SERIES - GLASS FROSTER

Frost craft beer glasses or cool plates before service.

CABINET CONSTRUCTION

Heavy-duty black coated steel exterior with a white painted aluminum interior. Stainless steel sliding door for easy access. Door lock protects contents inside.

Foamed-in-place CFC- and HCFC-free polyurethane insulation enhances the structural strength of the cabinet and helps increase energy efficiency.

REFRIGERATION SYSTEM

Environmentally-safe R290 refrigerant.

SHELVING

8 epoxy-coated steel shelves included to hold plates or glasses.

MODEL FEATURES

Digital controller features auto-defrost function. Not intended for the storage or display of perishable materials.

SPECIAL FEATURES

- Eco-friendly R290 hydrocarbon refrigerant
- 8 epoxy-coated steel shelves for glasses or plates
- Sliding stainless steel door for easy access
- Maintains temperatures between -5 and -2°F
- Easy-to-use, digital temperature controls
- Foamed-in-place polyurethane insulation
- Black coated steel exterior
- Painted aluminum interior
- Auto defrost for easy maintenance
- 115V, 1/4 hp



Model	Lids	Cabinet Dimensions (inches / mm)			Net Volume (cu. ft.)	HP	Voltage	Amps	NEMA Config.
		L	D	H					
XGF-50-HC	2	50 1270	28 1/2 724	33 838	12.2	1/4	115/60/1	5.3	5-15P 

XGF Series

Glass Froster

MODEL #XGF-50-HC



TECHNICAL DATA

Dimensions

Exterior Dimensions	50"W x 28½"D x 33"H
Interior Dimensions	45"W x 23"D x 26"H
Net Volume	12.2 cu. ft.
Net Weight	181 lb.
Gross Weight	224 lb.
Packaging Dimensions	54"W x 30"D x 42"H

Cooling

Temperature Range	-5 - 2°F
Refrigerant	R290
Max. Ambient Temperature	90°F
Defrosting	Automatic
Temperature Controller	Digital
Horsepower	1/4



Construction

Exterior Material	Black Plastic Coated Steel
Interior Material	Painted Aluminum
Insulation Material	Foamed-In-Place polyurethane
Shelves	(6) 15" x 10" and (2) 14⅜" x 22⅝"
Shelf Material	Epoxy Coated Steel
Shelf Load Capacity	55 lb.

Electrical

Voltage	115
Amps	5.3
Hz	60
Phase	1
Plug Type	NEMA 5-15P
Electrical Cord Length	90"

PLAN VIEW

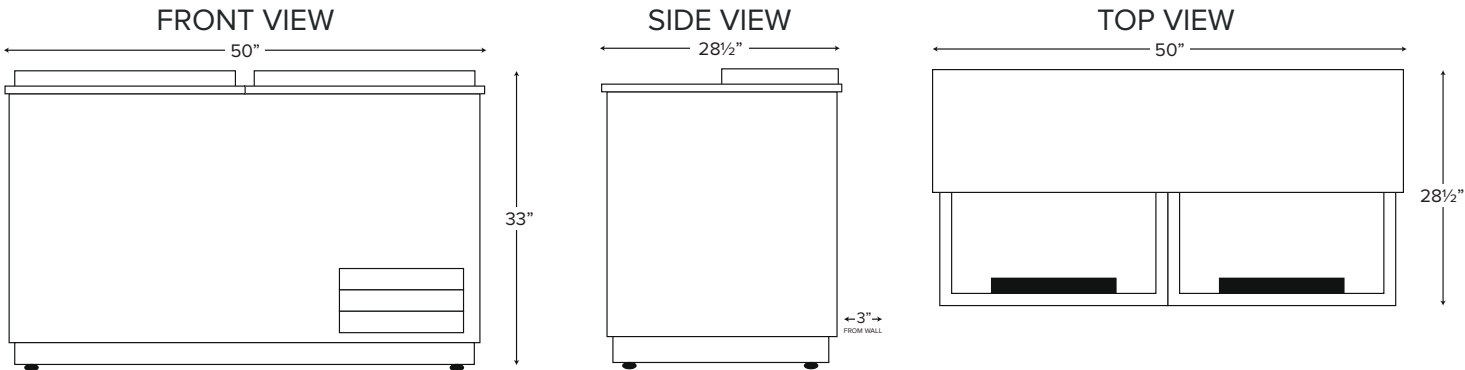

NEMA 5-15P