

XRM Series

Glass Door Merchandiser

MODEL #XRM-49F-HC

Xiltek

XRM SERIES - GLASS DOOR FREEZER

Used for the merchandising and storage of hermetically sealed products for sale.

CABINET CONSTRUCTION

Heavy duty construction includes black coated aluminum interior walls and stainless steel floor. Exterior features black or white peel and chip-resistant, powder-coated cold rolled steel that is durable and permanent.

Foamed-in-place CFC- and HCFC-free polyurethane insulation enhances the structural strength of the cabinet and helps increase energy efficiency.

One-piece grill is easily removed for cleaning and servicing.

2 dual-pane tempered glass swing doors self-close to save energy.

REFRIGERATION SYSTEM

Environmentally-safe R290 refrigerant. Bottom mount condensing unit positioned for easy maintenance. "No stoop" lower shelf maximizes visibility by raising merchandised product to a higher level.

SHELVING

8 epoxy-coated steel shelves accommodate up to 90 lb. each.

MODEL FEATURES

Copper evaporator coil eliminates the potential of corrosion.

Convenient clean-out drain built into cabinet floor.

Digital controller features auto-defrost function.

LED lighted interior saves energy by producing less heat and maximizes product visibility in display area.

SPECIAL FEATURES

- Eco-friendly R290 hydrocarbon refrigerant
- 2 self-closing, glass swing doors
- 8 epoxy-coated steel shelves each holds up to 90 lb. of weight
- Bright, LED lighting
- Maintains temperatures between (-8)°F - (-1)°F
- Easy-to-use, digital temperature controls
- Foamed-in-place polyurethane insulation
- Black or white coated steel exterior and painted aluminum interior
- Stainless steel floor
- Auto defrost for easy maintenance
- 115V, 1 hp



Model	Doors	Shelves	Cabinet Dimensions (inches) (mm)			CAP. CU.FT. LITER	HP	Voltage	Amps	NEMA Config.	
			L	D	H						
XRM-49F-HC	2	8	53 1/8 1350	31 7/8 810	84 3/8 2188	49 1390	1	115/60/1	9.2	5-20P	

XRM Series Glass Door Merchandiser

MODELS #XRM-49F-HC

Xiltek

TECHNICAL DATA

Dimensions

Exterior Dimensions	53 $\frac{1}{8}$ "W x 31 $\frac{7}{8}$ "D x 84 $\frac{3}{8}$ "H
Interior Dimensions	50"W x 28 $\frac{3}{8}$ "D x 61 $\frac{7}{8}$ "H
Net Volume	42.5 cu. ft.
Net Weight	437 lb.
Gross Weight	480 lb.
Packaging Dimensions	54 $\frac{1}{4}$ "W x 33"D x 84 $\frac{1}{2}$ "H

Construction

Exterior Material	Black Coated Steel
Interior Material	Painted Aluminum
Door Type	Glass Swing
Insulation Material	Foamed-In-Place Polyurethane
Shelf Size	(8) 24 $\frac{3}{8}$ " x 23 $\frac{5}{8}$ "
Shelf Material	Plastic-Coated Steel
Shelf Load Capacity	90 lb.


Cooling

Temperature Range	(-8)°F - (-1)°F
Refrigerant	R290
Max. Ambient Temperature	90
Defrosting	Automatic
Temperature Controller	Digital
Horsepower	1/4

Electrical

Voltage	115
Amps	4.5
Hz	60
Phase	1
Plug Type	NEMA 5-20P
Electrical Cord Length	96"

PLAN VIEW

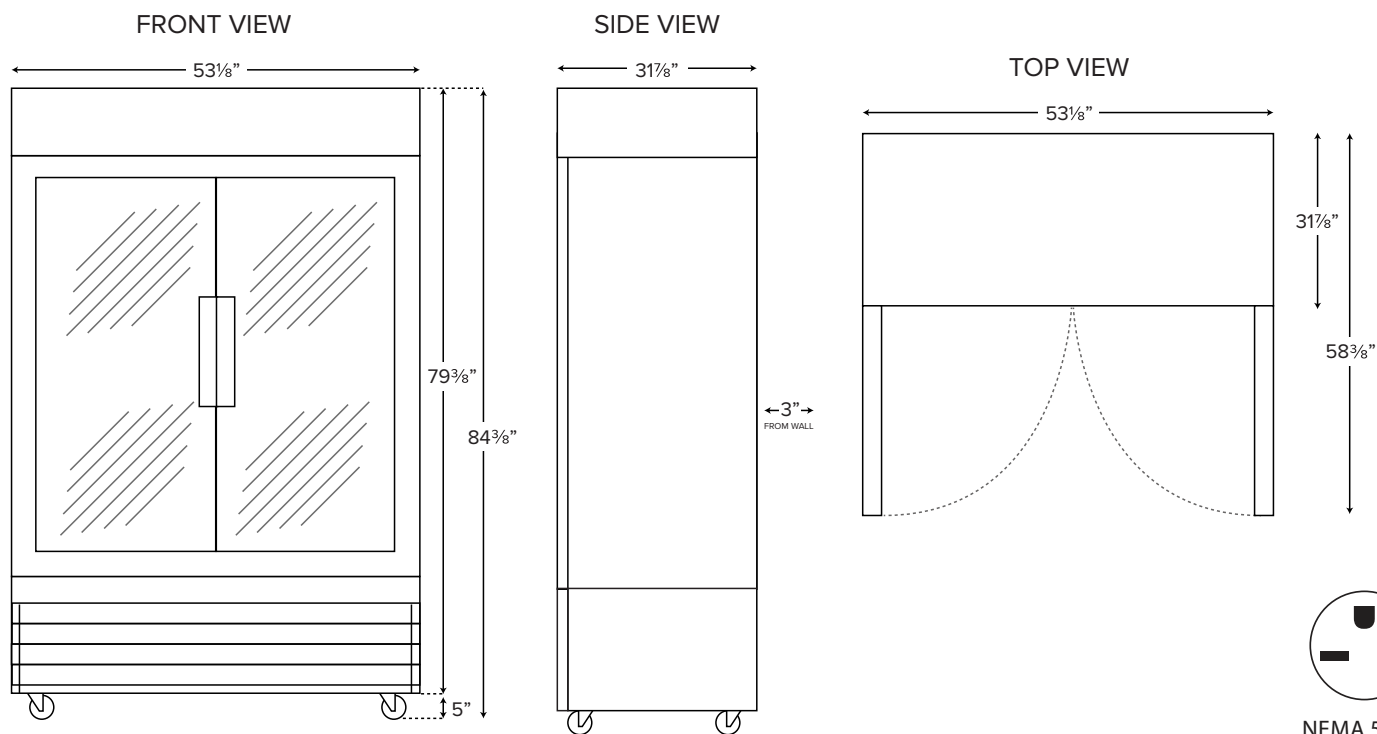

NEMA 5-20P