XRM Series

Glass-Door Merchandiser

MODEL #XRM-49S-HC

XRM SERIES | SLIDING-DOOR MERCHANDISER REFRIGERATOR

Display chilled drinks and packaged foods in a two-door merchandiser designed for daily retail service. Glass visibility, interior lighting and organized shelving help customers find products while staff manage stock efficiently.

CABINET CONSTRUCTION

Heavy duty construction includes white-coated aluminum interior walls and stainless steel floor. Exterior features peel and chip-resistant, powder-coated cold rolled steel that is durable and permanent.

LED lighted interior saves energy by producing less heat and maximizes product visibility in display area.

Foamed-in-place CFC- and HCFC-free polyurethane insulation enhances the structural strength of the cabinet and helps increase energy efficiency.

One-piece grill is easily removed for cleaning and servicing.

2 doors feature inside and outside tempered glass panes. Self-closing, sliding doors won't fog with use, ensuring clear product visibility at all times. Unlike swing doors, they don't require clearance outside the unit to open.

REFRIGERATION SYSTEM

Environmentally-safe R290 refrigerant. Bottom-mounted condensing unit positioned for easy maintenance.
"No stoop" lower shelf maximizes visibility by raising merchandised product to a higher level.

SHELVING

8 white epoxy-coated steel shelves included. Each accommodate up to 90 lb.

MODEL FEATURES

Copper evaporator coil eliminates the potential of corrosion.

Convenient clean-out drain built into cabinet floor.

Easy to read digital controls.

SPECIAL FEATURES

- Two sliding glass doors.
- Adjustable shelving and interior LED lighting.
- Digital temperature and automatic defrost controls.
- Insulated glass supports clear product visibility.
- Accessible refrigeration simplifies service and maintenance.
- Heavy-duty casters assist positioning and floor cleaning.

Intertek Intertek

Conforms to UL & NSF-7 Standard

Model	Doors	Shelves	Cabinet Dimensions (inches) (mm)			CAP. CU.FT. LITER	HP	Voltage	Amps	NEMA Config.
			L	D	H					
XRM-49S-HC	2	8	53.1 1350	31.9 810	84.38 2144	49 1388	1/4+	115/60/1	4.3	5-15P

XRM Series

Glass-Door Merchandiser

MODEL #XRM-49S-HC

Xiltek

TECHNICAL DATA

Dimensions

Exterior Dimensions	53⅛"W x 31⅞"D x 84⅜"H
Interior Dimensions	50"W x 28⅜"D x 61⅞"H
Net Volume	49 cu. ft.
Net Weight	437 lbs.
Gross Weight	480 lbs.
Packaging Dimensions	54¼"W x 33"D x 84½"H

Cooling

Temperature Range	33°F - 41°F
Refrigerant	R290
Max. Ambient Temperature	90
Defrosting	Automatic
Temperature Controller	Digital
Horsepower	1/4

Construction

Exterior Material	Coated steel
Interior Material	Painted aluminum
Door Type	Glass sliding
Insulation Material	Foamed-in -place polyurethane
Shelf Size	(8) 24⅜" x 23⅝"
Shelf Material	Epoxy-coated steel
Shelf Load Capacity	90 lb.

Electrical

Voltage	115
Amps	4.3
Hz	60
Phase	1
Plug Type	NEMA 5-15P
Electrical Cord Length	96"
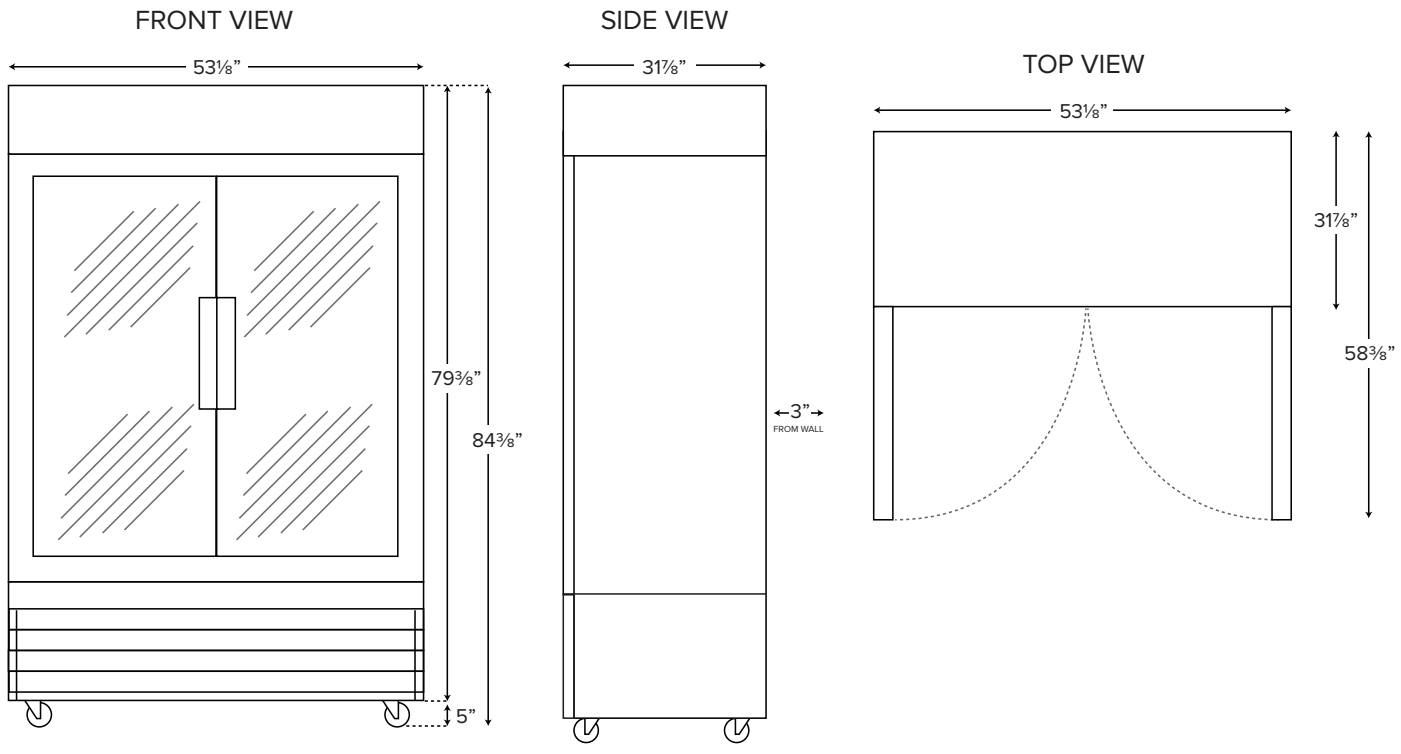
PLAN VIEW