

XUC Series Undercounter Freezer

MODELS #XUC-48F-HC

CABINET CONSTRUCTION

Heavy duty construction includes a 304 type stainless steel interior and a 430 type stainless steel exterior, resulting in strength, durability, and an attractive, sleek appearance.

Foamed-in-place CFC- and HCFC-free polyurethane insulation enhances the structural strength of the cabinet and helps increase energy efficiency.

One-piece rear grill is easily removed for cleaning and servicing.

2 doors feature easy-to-use recessed handles for quick interior access. Doors stay open past 90° for easy loading, but will self-close under 90° to save energy.

REFRIGERATION SYSTEM

Environmentally safe R290 refrigerant. Rear-mounted condensing unit positioned for easy maintenance.

SHELVING

2 white epoxy-coated steel shelves included. Each accommodate up to 90 lb.

MODEL FEATURES

Copper evaporator coil eliminates the potential of corrosion.

Interior wall-mounted thermometer for easy temperature monitoring.

Preprogrammed digital controller features auto-defrost function.



★ Conforms to UL & NSF-7 Standards



XUC SERIES - UNDERCOUNTER FREEZER

Increase cold food prep storage in your kitchen

SPECIAL FEATURES

- Eco-friendly R290 hydrocarbon refrigerant
- Strong and sleek 430 type stainless steel exterior
- 304 type stainless steel interior maintains temperature from (-8)°F - (-1)°F
- Two epoxy-coated steel shelves accommodate up to 90 lb. each
- Foamed-in-place polyurethane insulation
- Easy-to-read digital temperature controller and auto-de-frost function
- 115V; 1/4hp



Model	Doors	Shelves	Cabinet Dimensions (inches) (mm)			CAP. CU.FT. LITER	HP	Voltage	Amps	NEMA Config.
			L	D	H					
XUC-48F-HC	2	2	47 1/4 1200	29 1/2 750	35 1/4 895	12 338	1/4+	115/60/1	4.5	5-15P 

XUC Series

Undercounter Freezer



MODELS #XUC-48F-HC

Xiltek

TECHNICAL DATA

Width	47 1/4 Inches
Depth	29 1/2 Inches
Height	35 1/4 Inches
Interior Width	42 1/2 Inches
Interior Depth	22 7/8 Inches
Interior Height	23 1/2 Inches
Amps	4.5 Amps
Hertz	60 Hertz
Phase	1 Phase
Voltage	115 Volts
Access Type	Doors
BTU (LBP)	1264
Capacity	12 cu. ft.
Compressor Location	Rear Mounted
Compressor Style	Side / Rear Breathing
Door Style	Swing
Door Type	Solid
Hinge Location	Left/Right
Horsepower	1/4 HP
Number of Doors	2
Number of Shelves	2 Shelves
Plug Type	NEMA 5-15P
Refrigerant Type	R-290
Style	Counter Height
Temperature Range	-8 -- -1 Degrees F
Type	Freezers

PLAN VIEW

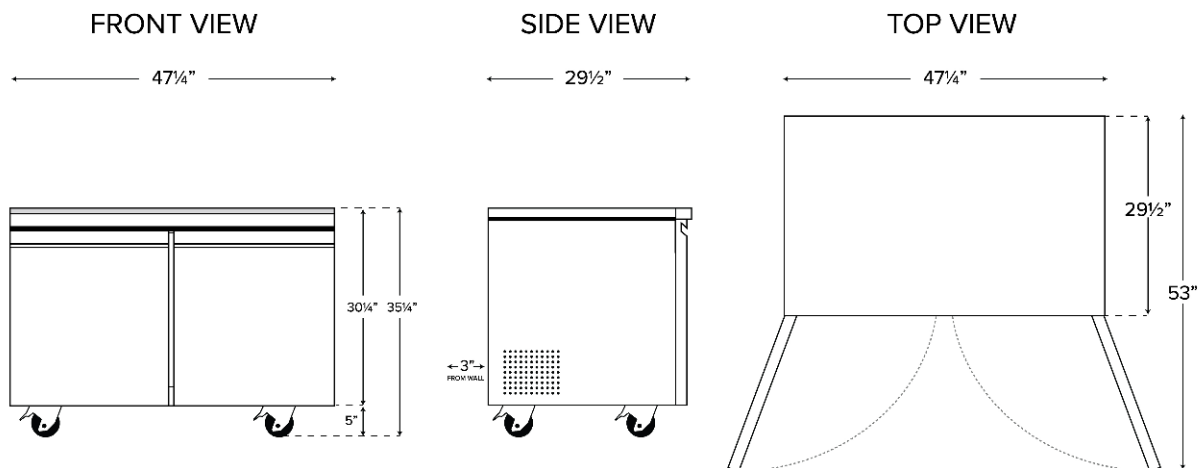

NEMA 5-15P