

XDC Series

Deli Case

MODEL #XDC-163SS-HC

Xiltek

XDC SERIES - DELI CASE

For merchandising and storage of deli meats and cheeses, and grab and go sandwiches and salads.

CABINET CONSTRUCTION

Stainless steel exterior with aluminum interior. Interior features stainless steel floor to resist corrosion and rust from the inevitable spill or leak.

Curved, front glass pane provides product visibility for merchandising.

Foamed-in-place CFC- and HCFC-free polyurethane insulation enhances the structural integrity of the cabinet and helps increase energy efficiency.

DOORS

Rear doors slide open for easy placement and removal of products.

REFRIGERATION SYSTEM

Environmentally safe R290 refrigerant. Rear-mounted condensing unit positioned for easy maintenance.

Gravity coils help create high-humidity environment to prevent meat from drying out.

SHELVING

9 epoxy-coated steel shelves included. Each accommodates up to 132 lb. to best suit your needs.

MODEL FEATURES

Intuitive, easy to read digital controls. Auto-defrost function simplifies maintenance and servicing.

Interior LED lighting illuminates product for a bright, effective display.

SPECIAL FEATURES

- Front glass pane for merchandise visibility
- 9 epoxy-coated shelves for organized display
- 21.9 cu. ft. of refrigerated storage space
- Foamed-in-place polyurethane insulation
- Digital temperature controls hold at 33-40°F
- Environmentally-friendly R290 refrigerant
- Type 430 stainless steel exterior
- Painted aluminum and 304 type stainless steel interior
- Auto defrost feature simplifies maintenance
- 3/5 hp compressor



Model	Doors	Shelves	Cabinet Dimensions (inches) (mm)			CAP. CU.FT. LITER	HP	Voltage	Amps	NEMA Config.
			L	D	H					
XDC-163SS-HC	3	9	65 1651	32 1/2 825	47 7/8 1089	22 620	3/5	115/60/1	7.2	5-15P 

XDC Series Deli Case

MODEL #XDC-163SS-HC

Xiltek

TECHNICAL DATA

Dimensions

Exterior Dimensions	64¼"W x 32½"D x 47 ⅞"H
Interior Dimensions	60¼"W x 26¾"D x 26¾"H
Net Volume	21.9 cu. ft.
Net Weight	400 lb.
Gross Weight	485 lb.
Packing Dimensions	68¼"W x 36¼"D x 48¾"H

Construction

Exterior Material	Type 430 Stainless Steel
Interior Material	Painted Aluminum and Type 304 Stainless Steel
Insulation Material	Foamed-in-place Polyurethane
# of Doors	3
Door Type	Sliding
# of Shelves	(6) 18½"W x 22½"D and (3) 19½"W x 24¾"D
Shelf Material	Epoxy-Coated Steel
Shelf Load Capacity	132 lb.


Cooling

Temperature Range	33°F - 40°F
Refrigerant	R290
Max. Ambient Temperature	90°F
Defrosting	Automatic
Temperature Controller	Digital
Horsepower	3/5
BTU/Hr	2760

Electrical

Voltage	115
Amps	7.14
Hz	60
Phase	1
Plug Type	NEMA 5-15P
Electrical Cord Length	98"

PLAN VIEW

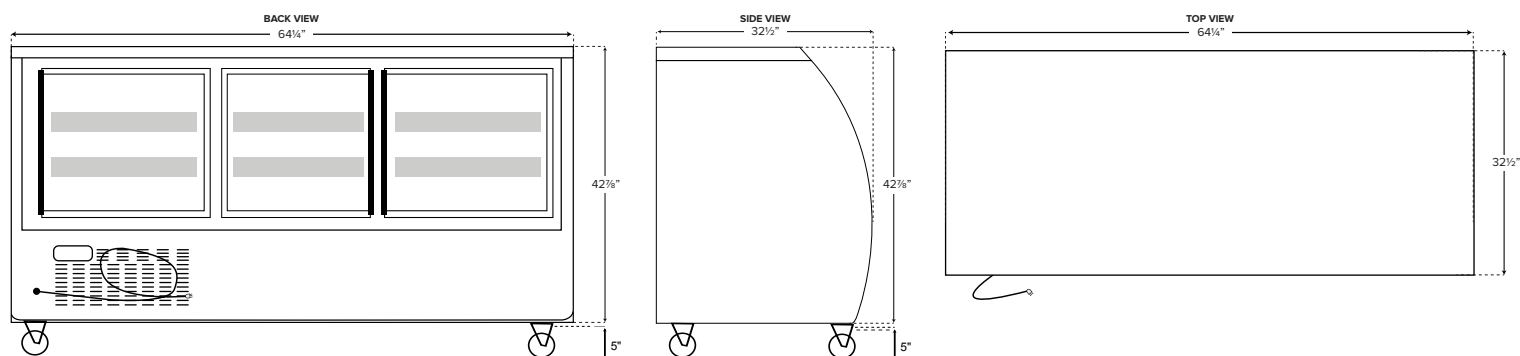

NEMA 5-15P