

XRM Series

Glass Door Merchandiser

MODELS | #XRM-10-HC

Xiltek

XRM SERIES - GLASS DOOR REFRIGERATOR

Used for the merchandising and storage of hermetically sealed products for sale

CABINET CONSTRUCTION

Heavy duty construction includes white-coated aluminum interior walls and stainless steel floor. Exterior features peel and chip-resistant, powder-coated cold rolled steel that is durable and permanent.

LED lighted interior saves energy by producing less heat and maximizes product visibility in display area.

Foamed-in-place CFC- and HCFC-free polyurethane insulation enhances the structural strength of the cabinet and helps increase energy efficiency.

One-piece grill is easily removed for cleaning and servicing.

Dual-pane tempered glass door self-closes to save energy.

REFRIGERATION SYSTEM

Environmentally-safe R290 refrigerant. Bottom mount condensing unit positioned for easy maintenance.

"No stoop" lower shelf maximizes visibility by raising merchandised product to a higher level.

SHELVING

Four white epoxy-coated steel shelves included.

MODEL FEATURES

Copper evaporator coil eliminates the potential of corrosion.

Convenient clean-out drain built into cabinet floor.

Easy to read digital controls.

SPECIAL FEATURES

- Single self-closing, anti-fog glass door
- Interior LED lighting
- (4) Epoxy-coated steel shelves included
- Foamed-in-place polyurethane insulation
- Bottom mount condensing unit
- Removable door gasket for easy cleaning
- Automatic defrosting
- Stainless steel floor
- Copper evaporator
- Available in black or white powder-coated steel exterior



Model	Doors	Shelves	Cabinet Dimensions (inches) (mm)			CAP. CU.FT. LITER	HP	Voltage	Amps	NEMA Config.
			L	D	H					
XRM-10-HC	1	4	21.7 550	21.7 550	63 1600	9.1 258	1/5	115/60/1	2.88	5-15P 

XRM Series

Glass Door Merchandiser

MODELS | #XRM-10-HC

X

il

tek

TECHNICAL DATA

Dimensions

Exterior Dimensions	21 ⁵ / ₈ "W x 21 ⁵ / ₈ "D x 63"H
Interior Dimensions	18 ⁷ / ₈ "W x 18 ¹ / ₄ "D x 46"H
Net Volume	9.1 cu. ft.
Net Weight	190 lbs.
Gross Weight	224 lbs.
Packaging Dimensions	23 ³ / ₄ "W x 24 ³ / ₄ "D x 69"H

Cooling

Temperature Range	33°F - 40°F
Refrigerant	R-290
Max. Ambient Temperature	90°F
Defrosting	Automatic
Temperature Controller	Digital
Horsepower	1/5



Construction

Exterior Material	Coated steel
Interior Material	Painted aluminum
Door Type	Glass swing
Insulation Material	Foamed-in -place polyurethane
Shelf Size	(4) 14" x 18"
Shelf Material	Epoxy-coated steel
Shelf Load Capacity	90 lb.

Electrical

Voltage	115
Amps	2.88
Hz	60
Phase	1
Plug Type	NEMA 5-15P
Electrical Cord Length	84"

PLAN VIEW

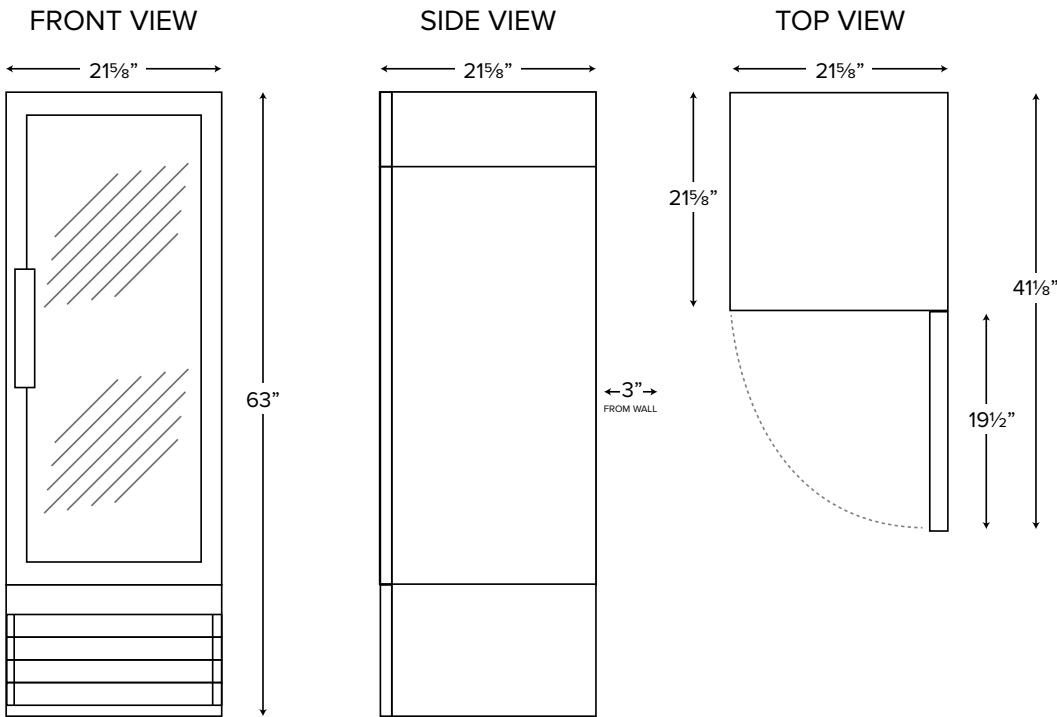

NEMA 5-15P