

XRM Series

Glass Door Merchandiser

MODELS | #XRM-16F-HC

Xiltek

XRM SERIES - GLASS DOOR FREEZER

Used for the merchandising and storage of hermetically sealed products for sale

CABINET CONSTRUCTION

Heavy duty construction includes white-coated aluminum interior walls and stainless steel floor. Exterior features peel and chip-resistant, powder-coated cold rolled steel that is durable and permanent.

LED lighted interior saves energy by producing less heat and maximizes product visibility in display area.

Foamed-in-place CFC- and HCFC-free polyurethane insulation enhances the structural strength of the cabinet and helps increase energy efficiency.

One-piece grill is easily removed for cleaning and servicing.

Dual-pane tempered glass door self-closes to save energy.

REFRIGERATION SYSTEM

Environmentally-safe R290 refrigerant. Bottom-mounted condensing unit positioned for easy maintenance.

"No stoop" lower shelf maximizes visibility by raising merchandised product to a higher level.

SHELVING

4 white epoxy-coated steel shelves included. Each accommodate up to 90 lb.

MODEL FEATURES

Copper evaporator coil eliminates the potential of corrosion.

Convenient clean-out drain built into cabinet floor.

Easy to read digital controls.

SPECIAL FEATURES

- Single self-closing, anti-fog glass door
- Interior LED lighting
- (4) epoxy-coated steel shelves included
- Foamed-in-place polyurethane insulation
- Bottom mount condensing unit
- Removable door gasket for easy cleaning
- Automatic defrosting
- Stainless steel floor
- Copper evaporator
- Eco-friendly R290 hydrocarbon refrigerant



Model	Doors	Shelves	Cabinet Dimensions (inches) (mm)			CAP. CU.FT. LITER	HP	Voltage	Amps	NEMA Config.
			L	D	H					
XRM-16F-HC	1	4	27.2 690	26.2 665	85.38 2144	16 450	3/4	115/60/1	8.8	5-15P 

XRM Series Glass Door Merchandiser

MODELS | #XRM-16F-HC

Xiltek

TECHNICAL DATA

Dimensions

Exterior Dimensions	27 ¹ / ₈ "W x 26 ¹ / ₄ "D x 85 ³ / ₈ "H
Interior Dimensions	21 ¹ / ₄ "W x 19 ¹ / ₄ "D x 55 ¹ / ₈ "H
Net Volume	16 cu. ft.
Net Weight	304 lbs.
Gross Weight	348 lbs.
Packaging Dimensions	30 ¹ / ₄ "W x 30 ³ / ₄ "D x 87"H

Construction

Exterior Material	Coated steel
Interior Material	Painted aluminum
Door Type	Glass swing
Insulation Material	Foamed-in -place polyurethane
Shelf Size	(4) 20 ⁷ / ₈ " x 17 ³ / ₄ "
Shelf Material	Epoxy-coated steel
Shelf Load Capacity	90 lb.



Cooling

Temperature Range	(-8)°F - (-1)°F
Refrigerant	R290
Max. Ambient Temperature	90
Defrosting	Automatic
Temperature Controller	Digital
Horsepower	3/4

Electrical

Voltage	115
Amps	8.8
Hz	60
Phase	1
Plug Type	NEMA 5-15P
Electrical Cord Length	84"

PLAN VIEW

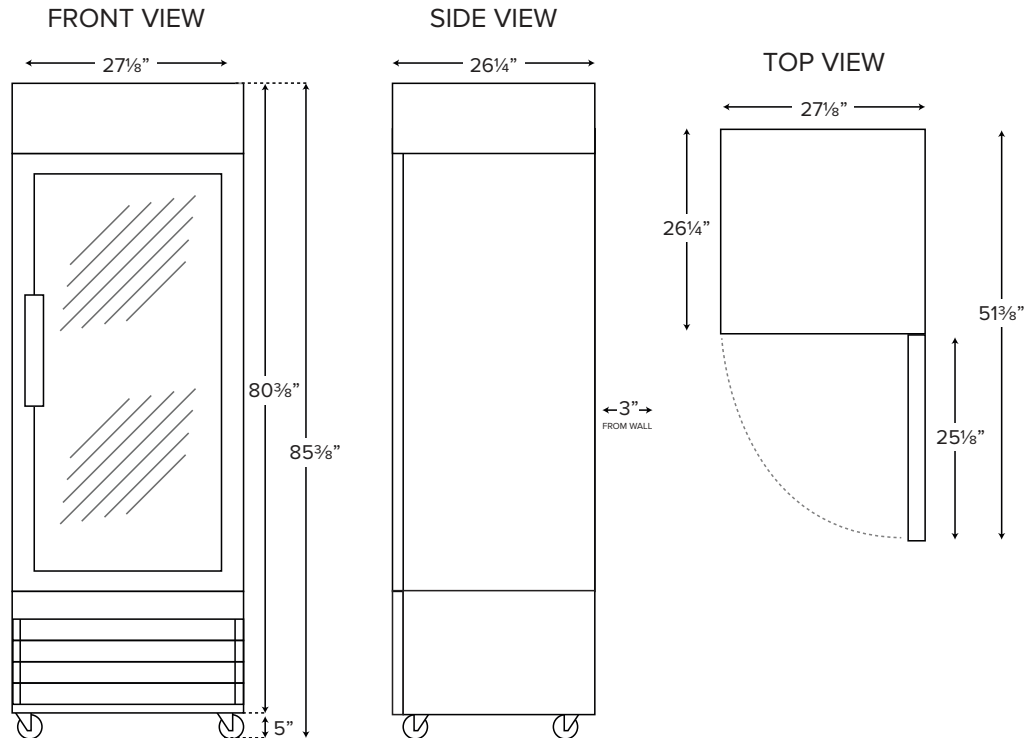

NEMA 5-15P