XRM Series

Glass-Door Merchandiser

MODEL #XRM-16F-HC

XRM SERIES | SWING-DOOR MERCHANDISER FREEZER

Display ice cream and frozen foods in a one-door merchandiser designed for daily retail service. Glass visibility, interior lighting and organized shelving help customers find products while staff manage stock efficiently.

CABINET CONSTRUCTION

Heavy duty construction includes white-coated aluminum interior walls and stainless steel floor. Exterior features peel and chip-resistant, powder-coated cold rolled steel that is durable and permanent.

LED lighted interior saves energy by producing less heat and maximizes product visibility in display area.

Foamed-in-place CFC- and HCFC-free polyurethane insulation enhances the structural strength of the cabinet and helps increase energy efficiency.

One-piece grill is easily removed for cleaning and servicing.

Dual-pane tempered glass door self-closes to save energy.

REFRIGERATION SYSTEM

Environmentally-safe R290 refrigerant. Bottom-mounted condensing unit positioned for easy maintenance.
“No stoop” lower shelf maximizes visibility by raising merchandised product to a higher level.

SHELVING

4 white epoxy-coated steel shelves included. Each accommodate up to 90 lb.

MODEL FEATURES

Copper evaporator coil eliminates the potential of corrosion.

Convenient clean-out drain built into cabinet floor.

Easy to read digital controls.

SPECIAL FEATURES

- One glass swing doors for product display.
- Adjustable shelving and interior LED lighting.
- Digital temperature and automatic defrost controls.
- Insulated glass supports clear product visibility.
- Accessible refrigeration simplifies service and maintenance.
- Heavy-duty casters assist positioning and floor cleaning.

Intertek Intertek

Conforms to UL & NSF-7 Standard

Model	Doors	Shelves	Cabinet Dimensions (inches) (mm)			CAP. CU.FT. LITER	HP	Voltage	Amps	NEMA Config.
			L	D	H					
XRM-16F-HC	1	4	27.2 690	26.2 665	85.38 2144	16 453	3/4	115/60/1	8.8	5-15P

XRM Series

Glass-Door Merchandiser

MODEL #XRM-16F-HC

Xiltek

TECHNICAL DATA

Dimensions

Exterior Dimensions	27⅛"W x 26¼"D x 85⅜"H
Interior Dimensions	21¼"W x 19¼"D x 55⅛"H
Net Volume	16 cu. ft.
Net Weight	304 lbs.
Gross Weight	348 lbs.
Packaging Dimensions	30¼"W x 30¾"D x 87"H

Cooling

Temperature Range	-10°F - 0°F
Refrigerant	R290
Max. Ambient Temperature	90
Defrosting	Automatic
Temperature Controller	Digital
Horsepower	3/4

Construction

Exterior Material	Coated steel
Interior Material	Painted aluminum
Door Type	Glass swing
Insulation Material	Foamed-in -place polyurethane
Shelf Size	(4) 20⅞" x 17¾"
Shelf Material	Epoxy-coated steel
Shelf Load Capacity	90 lb.

Electrical

Voltage	115
Amps	8.8
Hz	60
Phase	1
Plug Type	NEMA 5-15P
Electrical Cord Length	84"
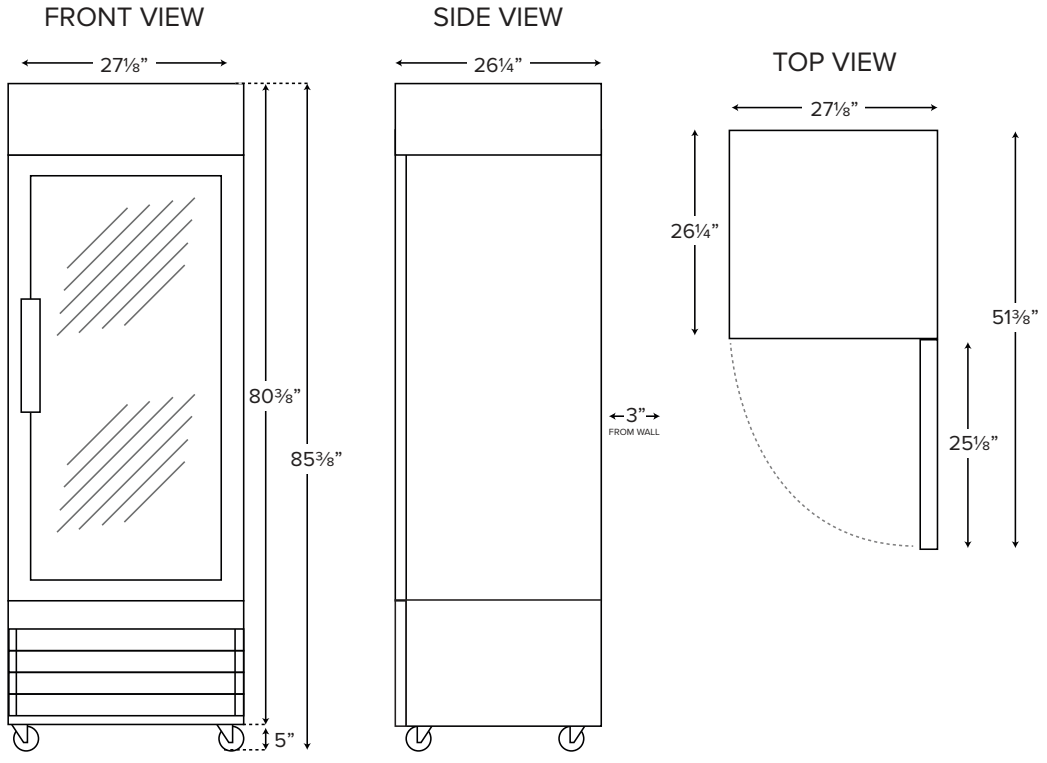
PLAN VIEW